

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**Only for new nonprovisional applications under  
37 C.F.R. § 1.53(b))

Attorney Docket No.

705835US1RAF

First Inventor or  
Application Identifier

Xi Jiang

Title ROUTE-BASED COMMUNICATION PLANNING ARCHITECTURE AND  
METHOD FOR WIRELESS COMMUNICATION

Express Mail Label No.

Express Mail Label No. EL536120471US

**APPLICATION ELEMENTS**See MPEP Chapter 600 concerning utility patent  
application contents.ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 202311. ☒ \*Fee Transmittal Form (e.g. PTO/SB/17)  
(Submit an original and a duplicate for fee processing)5. ☐ Microfiche Computer Program (Appendix)2. ☒ Specification [Total Pages 37]

- (preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed Sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claims(s)
- Abstract of the Disclosure

6. Nucleotide and/or Amino Acid Sequence Submission  
(If applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 8]7. ☐ Assignment Papers (cover sheet & document(s))8. ☐ 37 C.F.R. § 3.37(b) Statement ☐ Power of  
(when there is an assignee) Attorney9. ☐ English Translation Document (if applicable)10. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations11. ☐ Preliminary Amendment12. ☒ Return Receipt Postcard MPEP 503)13. ☐ Statement (s) ☐ Statement filed in prior  
(PTO/SB/09-12) application, Status still proper  
and desired14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)15. ☐ Other:


\*NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY  
SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS  
REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR  
APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a **CONTINUING APPLICATION**, Check appropriate box, and supply the requisite information below and in a preliminary amendment:  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_

FOR CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under  
Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The  
incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.**17. CORRESPONDENCE ADDRESS**☐ XXX Customer Number or Bar Code Label  or ☐ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

Name	Roland A Fuller III				
	DaimlerChrysler Intellectual Capital Corporation				
Address	CIMS 483-02-19				
	800 Chrysler Drive				
City	Auburn Hills	State	Michigan	Zip Code	48326-2757
Country	United States	Telephone	(248) 944-6514	Fax	(248) 944-6537

Name (Print or Type)	Roland A Fuller III	Registration No.	31,160
Signature		Date	11/20/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any  
comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office,  
Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box  
Patent Application, Washington, D.C. 20231.

Under the Paperwork Reduction act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# FEE TRANSMITTAL

## For FY 1999

Patent fees are subject to annual revision.

Small Entity payments must be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB/09-12.

TOTAL AMOUNT OF PAYMENT (\$) 1594.00

## Complete if Known

Application Number	Unknown
Filing Date	November 21, 2000 (Express Mail)
First Named Inventor	Xi Jiang
Examiner Name	Unknown
Group / Art Unit	Unknown
Attorney Docket No.	705835USIRAF

## METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number 03-1800

Deposit Account Name DaimlerChrysler Intellectual Capital Corporation

- ☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17

- ☐ Payment Enclosed:  
☐ Check ☐ Money Order ☐ Other

## FEE CALCULATION

LARGE ENTITY FILING FEE		SMALL ENTITY FILING FEE		Fee Description	Fee Paid
Large Entity Fee Code	Fee (\$)	Small Entity Fee Code	Fee (\$)		
101	710	201	355	Utility filing fee	710
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	
SUBTOTAL (1)					710

## 2. EXTRA CLAIM FEES

Total Claims	Extra Claim	Fee from below	Fee Paid
38	-20** = 18	X 324 =	324
Independent Claims	10	- 3** = 7	X 560 = 560
Multiple Dependent		270 =	0

\*\*or number previously paid, if greater; For Reissues, see below

Large Entity Fee Code	Entity Fee (\$)	Small Entity Fee Code	Entity Fee (\$)	Fee Description
103	18	203	9	Claims in excess of 20
102	80	202	40	Independent claims in excess of 3
104	270	204	135	Multiple dependent claim, if not paid
109	80	209	40	** Reissue independent claims over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent
SUBTOTAL (2) (\$ 884)				

## FEE CALCULATION (continued)

LARGE ENTITY ADDITIONAL FEES		SMALL ENTITY ADDITIONAL FEES		Fee Description	Fee Paid
Large Entity Fee Code	Fee (\$)	Small Entity Fee Code	Fee (\$)		
105	130	205	65	Surcharge-late filing fee or oath	
127	50	227	25	Surcharge-late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for examination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,210	241	605	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Discl. Stmt.	
581	40	581	40	Recording of each patent assignment per property (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR 1.129(a))	
149	710	249	355	For each additional invention to be examined (34 CFR 1.129(b))	
Other fee (specify) _____					
Other fee (specify) _____					
* Reduced by Basic Filing Fee Paid					
SUBTOTAL (3) (\$ 0)					

## SUBMITTED BY

Typed or Printed Name

Roland A Fuller III

Signature

*R.A. Fuller III*

Date

11/20/00

## Complete (if applicable)

Reg. Number

31,160

Deposit Account User ID

APPLICATION FOR LETTERS PATENT OF  
THE UNITED STATES OF AMERICA

Entitled

ROUTE-BASED COMMUNICATION PLANNING ARCHITECTURE AND METHOD  
FOR WIRELESS COMMUNICATION

Inventor:

Xi Jiang

Attorney Docket No. 705835US1RAF

**Route-Based Communication Planning Architecture and Method**  
**for Wireless Communication**

This invention relates to mobile wireless communication, and more particularly,  
5 to a method of planning which of various wireless communication options to utilize for  
wireless communication in a mobile environment when one or more wireless  
communication options may be available for use, based on the location of the mobile  
user, the route the mobile user is travelling, and the availability of the various wireless  
communication options along the route.

**Background of the Invention**

Increasing numbers of vehicles come equipped with some form of "telematics"  
service platforms. Telematics services are those services enabled by a three-way  
marriage among vehicles, computing and communication technologies, and is sometimes  
15 used to mean the wireless linkage of vehicles to data networks, particularly the internet.  
These telematics service platforms are able to carry out various intelligent transportation  
system services, such as reporting a vehicle's status and position to a service center and  
provide certain applications such as emergency and safety assistance. In the next few  
years, more telematics products will be made available and eventually, most if not all  
20 vehicles will have some form of telematics platform that will offer various services, such  
as emergency services (*e.g.*, emergency communication in the event of an incident, such  
as airbag deployment), navigation services, concierge and transaction services (*e.g.*,  
restaurant information, hotel reservation), communication and personal information

services (*e.g.*, E-mail, calendar services), information services (*e.g.*, stock information, personalized news, sightseeing information), entertainment services (*e.g.*, interactive games, music downloads), and so forth.

These telematics service platforms require the use of some type of wireless communication. Since wireless communication is generally expensive relative to non-wireless communication (*e.g.*, cellular phone calls versus land line phone calls), the ability of these telematics products to use wireless communication options in the most cost effective manner will be an important factor in the success of vehicular telematics.

By wireless communication options, it is meant the various wireless communication networks available, discussed below, the various levels of service that each type of wireless communication network has available (*i.e.* transmission power level), as well as any other option that may now be available or will be available in the future for wireless communication.

In the near future, a variety of wireless communication options will be available for use by wireless communication devices in vehicles, such as satellite, cellular phone and short-range radio frequency (RF) links. These systems differ in cost, bandwidth and coverage. For example, in urban areas and along the major highways, emerging technologies, such as GPRS (general packet radio service) will be deployed in the U.S. in the next few years and will offer "always-on connections" and packet oriented data communications at higher bandwidths than today. Improved code division multiple access (CDMA) technology such as W-CDMA will also likely be established. Also, the Ricochet 2 metropolitan area access (MAN) wireless network will soon be available in 48 major metropolitan areas in the United States covering a very large percentage of the

population . These new wireless networks typically provide a higher bandwidth than existing wireless networks, such as the first generation cellular network (AMPS -- Advanced Mobile Phone System) and the second-generation cellular networks (GSM -- Global System for Mobile Communications; CDMA -- Code Division Multiple Access; and TDMA -- Time Division Multiple Access).

A general method to evaluate the existing and emerging wireless communication networks and services for data communication is to examine their cost and performance levels. The first generation AMPS cellular systems typically have a maximum data transfer rate of 9600 bps and the second generation digital wireless communication systems have a maximum bandwidth of 14.4 kbps. The new third generation cellular systems will have maximum bandwidths of around 128 kbps or even 384 kbps. Since the charge for cellular communication is high, particularly when compared to even interstate land line phone calls, the cost for transferring data using these systems can be quite high. For example, the cost to transfer one mega-byte of data using the second generation digital wireless communication systems runs around \$15.00 or higher. If a mobile user wants to obtain a large amount of content, the cost of doing so with cellular wireless communication can be quite high, making mobile data communication involving large amounts of data cost prohibitive to many potential users.

Fig. 1 provides a general illustration of the presently available wireless communication systems. They include regional area wireless networks 10, wide area wireless networks 12, metropolitan area networks 14, and local area networks 16. Regional area wireless networks 10 provide coverage over a large geographic region, such as the coverage provided by satellite based cellular communication networks and its

cost varies greatly. Wide area networks 12 are exemplified by the existing land based cellular phone systems mentioned above. They provide coverage over a relatively large geographic region, but to a lesser extent than regional area networks because the wide area networks utilized land based base station systems that individually have only a small geographic coverage. To obtain the wide area coverage, multiple base station systems must be spread throughout the coverage area with some degree of overlap in coverage. Thus, the geographic coverage provided by a given cellular phone system is often determined by population density and/or travel density in that locating base station systems in sparsely populated, lightly traveled geographic areas may not be cost justified.

Metropolitan area networks 14, as the name implies, provide coverage only in metropolitan areas. The most well known type of metropolitan area network is Metricom's Richochet2 network architecture. Wireless local area networks 16 provide very limited geographic coverage, typically on the order of 100 yards or less. Because of this limited geographic coverage, wireless local area networks have not been used to any extent in mobile communications and their application has been pretty much limited to use in office environments and the like where the work stations that are connected to the wireless local area network are located in close proximity to each other. One such of wireless local area network is the 802.11 wireless LAN.

Initially, when the cellular systems first became popular, the wide area network AMPS network was used. More recently, cellular systems have added the second-generation digital networks to the wide area networks being used as well as the satellite based regional area networks and the metropolitan area networks. As these additional networks have been added to the networks available for mobile communication use,

cellular in particular, mobile communication devices such as newer generation cell phones have been provided the capability to switch between various networks. For example, a cellular phone can utilize the first generation AMPS network or the second generation digital networks (such as GPRS, GSM and CDMA), and even the satellite based networks.

When the mobile communication device switches among wireless networks, this is known as vertical handoff. A simple form of vertical hand-off would involve a cell phone having multi-network capability selecting which network to use based upon factors such as cost, availability and performance and switching to a second network if coverage from the first network is lost. Vertical handoff is more than just the ability to use more than one wireless network. In this regard, the cellular phone must maintain the same phone number even when it has switched networks. For example, a user having a cell phone that has both analog and digital capability might select the digital network if it was available because it has better quality than the analog network, but select the analog network if digital coverage was not available. (In today's environment, the analog network has broader coverage than digital coverage.)

More sophisticated mobile communication devices will perform the vertical handoff automatically. For example, if a cellular phone has tri-mode capability of using the analog network, digital network, and satellite network, the phone might select the network to use based in order of preference and availability. The user would have entered an order of preference into the phone telling it to use the analog network if its available, then the digital network and then the satellite network. Assuming that the phone first connected to the analog network, the phone would switch to the digital



network if the user moves out of the analog coverage area, and then to the satellite network if the user moves out of both the analog and digital coverage area. Typically, the phone decides to switch based upon whether it is in the coverage area of a given network usually determined by signal strength from the network's antennas. One of the problems that this technique has is that by the time a determination is made that the network being used should be switched, there may be a loss of service due to the time that it takes to make the switchover. Also, if the switch is from a more expensive network to a lesser expensive network, such as from the satellite network to either the digital or analog network, the switch from the satellite network may not be accomplished when the user first enters the coverage area for the analog or digital network, resulting the user paying longer than necessary for the more expensive satellite network.

Vertical handoff is a well-understood technology in the mobile computing field. In general, it is about how to automate the connection status and routing table updates on top of the mobile Internet Protocol (Mobile IP) technology. However, due to the unpredictable nature of wireless network boundaries, there is often an abrupt cut-off of service when the boundary is reached. Consequently, the overall direction of vertical hand-off research is generally focused on quick recovery schemes, such as preventative multicast to neighboring base stations.

Accordingly, it is an objective of the present invention to provide a predictive method of achieving seamless vertical handoff in a wireless communication system.

It is a further objective of the present invention to utilize the bandwidth available with local area networks for mobile communication, even though the geographic coverage of local area networks is limited.

## **Summary of the Invention**

In order to achieve the forgoing objectives, a method is provided for selecting which of a plurality of wireless communication options will be used by a mobile communication device based on the location of the mobile communication device on a route, the route, and the availability for use of each of the plurality of wireless communication options along the route. In a further embodiment of the inventive method, information indicative of coverage areas for the wireless communication options available along the route are stored in a database by storing boundary locations of the coverage areas for the wireless communication options along the route where the boundary locations stored are boundary locations that are on streets of the route. In a further embodiment, updated information about the coverage areas is periodically obtained and the database updated accordingly.

In another embodiment of the invention, a uniform content layer application program interface is provided for application programs that use mobile communication provided by a mobile communication device. Information concerning any wireless communication options that are available for use by the mobile communication device as it traverses a route is stored in a database. The application program decide which wireless communication option to use based upon the information about the wireless communication options in the database.

In a further embodiment of the invention, a method of fueling a vehicle with information through a wireless communication device in the vehicle is provided. A predicted time when the vehicle will be able to communicate with an info-fueling station having a predictable geographic position is determined. A request for information from

the vehicle is sent through the wireless communication device to at least one wireless communication network. The information is routed from an information source in communication with the wireless communication network to the info-fueling station. The requested information is downloaded to the vehicle through the info-fueling station during the time that the wireless communication device in the vehicle is in communication range of the info-fueling station.

### **Brief Description of the Drawings**

The present invention will become more fully understood from the detailed description and the accompanying drawings, in which:

Fig. 1 is a pictorial illustration of “prior art” wireless communication systems;

Fig. 2 is a systems interaction diagram of an embodiment of the present invention;

Fig. 3 is a pictorial illustration of wireless communication options used in the method of Fig. 2;

Fig. 4 is a pictorial representation a wireless coverage database record format in accordance with an embodiment of the present invention;

Fig. 5 is a block diagram of a route-dependent communication planning architecture according to an embodiment of the present invention;

Fig. 6 is a schematic of a data structure for monitoring and reporting wireless coverage along routes in accordance with an embodiment of the present invention;

Fig. 7 is a flow chart of a monitoring routine used in an embodiment of the present invention;

Fig. 8 is a system interaction diagram of a method of performing route dependent vertical handoff in accordance with an embodiment of the present invention;

Fig 9 is a map of the route traversed by a vehicle containing a wireless communication device with reference to Fig. 8; and

5 Fig 10 is an illustrative graph showing how an application may describe its preferred wireless communication requirements in accordance with an embodiment of the present invention.

### **Detailed Description of the Preferred Embodiments**

10 Referring to Figs. 2 and 3, the route-based communication planning method of according to the present invention is described. (The elements of Fig. 1 that are common to Figs. 2 and 3 are identified with the same reference number.) This method is particularly advantageous for use with mobile wireless data communication applications, such as telematics applications, where data is being transmitted to and from the vehicle  
15 and will be described in that context, although the method is not limited to mobile wireless data communication applications.

A vehicle 18 has a mobile data communications device 20, illustratively, a computer having one or more wireless modems. This computer could be an off the shelf computer, such as a notebook computer, a personal digital assistant, or a computer built  
20 into the vehicle or another mobile device (*e.g.*, a cellular phone having data communication capability). The mobile communications device 20 has a communication availability monitor 34 which has a database of wireless communication network coverage information 22 (shown representatively in Fig. 4) and a communication

manager 36. Vehicle 18 also has a navigation system 26, such as that currently available in Mercedes-Benz vehicles. The navigation system 26 provides information describing a route 24 that the vehicle traverses and the location of the vehicle in the route, which it determines in a known fashion, such as from information obtained from a global positioning satellite 28.

As vehicle 18 traverses route 24, the mobile data communications device 20 is checking to determine what wireless communication networks and systems are available at particular points in the route, as described in more detail below. Based on the availability of the various wireless communication networks, the mobile communications device 20 determines which one it should use when it reaches each particular point and more specifically, if it should switch networks. If mobile communications device 20 determines that it should switch networks, such as from WAN 12 to MAN 14, it initiates the vertical handoff. Preferably, it does so in advance of reaching the predetermined point in the route, so that when the vehicle 18 reaches the predetermined point, the vertical hand-off occurs seamlessly and with minimum delay. Illustratively, the mobile communication device 20 knows how much time it takes to accomplish the vertical hand-off and, based on data such as the vehicle speed and the route the vehicle will take to reach the particular point, and initiates the request for the vertical handoff an appropriate amount of time in advance of the vehicle reaching the particular point so that the vertical handoff occurs seamlessly when the vehicle reaches the predetermined point.

More specifically, when vehicle 18 starts, communication availability monitor 34 obtains information about route 24, illustratively from an external source such as the vehicle's navigation system 26. It then creates a database of the coverage areas of the

wireless networks and systems that mobile communication device 20 can use as it traverses route 24. Communication availability monitor 34 at T0 informs communication manager 36 what wireless networks and systems are available, which in the example of Figs. 2 and 3, are WAN 12 and satellite network 10. Communication manager 36 then determines which wireless network to use, illustratively WAN 12 for reasons such as better cost or performance, and at T1 connects mobile communication device 20 to WAN 12.

As vehicle 18 traverses route 24, it reaches a point along the route that is a coverage boundary for MAN 14, indicated at T2-T4 (or just before the coverage boundary), where MAN 14 coverage is available. At T2, communication service availability monitor 34 informs communication manager 36 that MAN 14 coverage is now available. Communication manager 36 determines, based on factors such as cost and performance, that the network to which mobile data communication device 20 is connected should be switched from WAN 12 to MAN 12. At T3, communication manager 36 connects mobile data communication device 20 to MAN 14 and after the connection is established, disconnects mobile data communication device 20 from WAN 12 at T4.

Skipping to T14 (T5 – T13 are described below), when communication service availability monitor 34 determines that the vehicle will travel out of the coverage area for MAN 14 within a certain period of time, such as thirty seconds, it informs communication manager 36. At T15, communication manager 36 connects vehicle 18 to WAN 12, which communication manager determined was the best available choice, and at T16, disconnects vehicle 18 from MAN 12.

Referring to Fig. 5, an illustrative architecture 40 for the route dependent communication planning invention is shown. Architecture 40 includes wireless service availability monitor 34, communication manager 36 and communication protocol stacks 38, all of which are illustratively implemented in software as part of mobile

5 communication device 20. Wireless service availability monitor 34 includes wireless coverage manager 42, location manager 44 and integrated position sensors 46. Integrated position sensors 46 are illustratively known types of position sensors that can determine the geographic location of an object, such as an inertial guidance system, a GPS system, and can also comprise an interface with the navigation system 26 of vehicle 18.

10 Architecture 40 also includes navigation system 26, that is coupled to wireless coverage manager 42, and one or more applications 47 that communicate with communication manager 36 as described below.

Although shown separately from wireless coverage manager 42 in Fig. 5, location manager 44 and wireless coverage manager 42 logically interact to the point where they  
15 can both be considered part of wireless coverage manager 42. Location manager 44 keeps track of the current location of vehicle 18 and notifies wireless coverage manager 42 when vehicle 18 reaches a location registered by wireless coverage manager 42.

Wireless coverage manager 42 maintains network coverage database 22 and issues commands to communication manager 36 to initiate route based vertical handoff.

20 Integrated position sensors 46 obtain data indicative of the vehicle's geographic position, such as latitude and longitude, from sources such as the vehicle's navigation system 26 regarding the route 24 and the location of vehicle 18 on route 24.

As mentioned, wireless coverage manager 42 maintains network coverage database 22 (Fig. 4). Information regarding the coverage for each particular network is obtained from available sources, such as the network provider and signal strength monitoring by mobile communication device 20. Illustratively, this information is  
5 obtained by communication manager 36 and passed on to wireless coverage manager 42 for processing and eventual storage in network coverage database 22. From this information, the boundary locations of the network coverage on all the streets are determined and these boundary locations stored in network coverage database 22.

In an illustrative embodiment, the streets are divided into sections where a street  
10 section is a portion of a street in a digital map used in the navigational software used by the vehicle's navigational system 26. Each street section is illustratively identified with a unique integer, which allows easy sorting of the whole database by street. Network boundary locations are the locations on particular street sections where boundaries for the wireless networks lies. Latitude and longitude values, illustratively obtained by  
15 integrated position sensors 46, are stored to pinpoint each boundary location. A radius is also specified for each boundary location so that its location is precisely specified. An illustrative organization of database 22 is shown in Fig. 6.

Wireless coverage manager 42 also updates the network coverage database 22 as updated network coverage information is received, such as from communication manager  
20 36. Wireless coverage manager 42 illustratively reacts to updated coverage information in one of two ways. If the update is for a location not presently in network coverage database 22, wireless coverage manager 42 processes and stores it in network coverage database 22 in the manner described above. If the update is for a location that is



presently in network coverage database 22, it compares the information for that location stored in network coverage database 22 with the update information (as processed), and if the update information is different, updates the information in network coverage database 22 for that location.

5            Preferably the running average method is used to make the update. The location value generated by the running average method lies somewhere between the old value and the update value. The exact position is determined by a parameter, illustratively determined heuristically, that shifts the location value a certain percentage toward the update location value. In this way, an abnormal update value would not destroy the  
10 integrity of the network coverage database. If the update value persists in subsequent updates, then the value stored in the network coverage database for that location will eventually align itself to the update value.

Wireless coverage manager 42 also predicts the network coverage for a particular route. Information regarding route 24 that vehicle 18 is taking can be read in from a file  
15 or, as discussed above, obtained from the vehicle's navigation system 26. Wireless coverage manager 42 then develops a list of wireless network and systems boundary locations along route 24 that vehicle 18 is traversing and registers this list with location manager 44, *e.g.*, communicates the list to location manager 44 which stores it. Wireless coverage manager 42 also determines route turning points and registers these points with  
20 location manager 44. When wireless coverage manager 42 is notified by location manager 44 that a registered location is about to be reached, as described below, it checks to see if this registered location is a network boundary and if so, whether it is appropriate to switch networks. It may be that the preferred network is being used and the network

boundary about to be reached is for a different network. Also, it may be that even if the preferred network is not being used and the registered location about to be reached is a network boundary for the preferred location, the amount of time that the vehicle will be in a coverage area for the preferred network is so small that switching is not justified. If coverage manager determines that networks should be switched, it sends a command to communication manager 36 to initiate the vertical hand-off to switch networks.

Location manager 44 accepts the list of boundary locations along route 24 from wireless coverage manager 42 and stores it. Each location is specified in terms of the following information:

- Street section (same information that is stored in the network coverage data base 22 for the particular street section)
- Latitude, longitude (the location that location manager monitors for)
- Notification radius (specifies how far ahead of reaching the registered location either in distance or in time that location manager 44 notifies the registering component, usually, wireless coverage manager 42)
- Notification status (specifies whether this location should be continuously monitored or if it is to be checked one time only)
- Call back address (handler through which location manager 44 gives the notification)

Illustratively, the data base structure for the database where location manager 44 stores the registered location information is very similar to the structure of network coverage database 22.

Location manager 44 also obtains information regarding the street on which vehicle 18 is traveling from an external component, such as vehicle navigation system 26. Each time vehicle 18 turns onto a new street, location manager 44 accesses its database for the list of registered locations on the new street and uses this list as the monitoring  
5 list.

Fig. 7 is an illustrative monitoring routine used by location manager 44. At step 100, location manager 44 obtains the current location of vehicle 18 and its speed from integrated position sensors 46. At step 102, location manager 44 determines whether any of the locations in the monitoring list will be reached in the next time period,  
10 illustratively, one second. Location manager 44 makes this determination illustratively based on the speed of vehicle 18. In this regard, the speed information obtained by location manager 44 from integrated position sensors 46 is illustratively averaged with the prior speed information, using the running average method, and the averaged speed used to make the determination of whether a registered location will be reached in the  
15 next time period, illustratively, one second. This prevents the use of speed information that might not be representative of the speed of the vehicle over the next second, which might be the case in the event of quick braking or acceleration. If location manager 44 determines that a registered location will be reached in the next time period, it notifies the component that registered the location, usually wireless coverage manager 42, at step  
20 104, and proceeds to step 106. If not, location manager proceeds to step 106. At step 106, location manager updates its monitoring list if appropriate, such as removing a registered location that was reached if it was registered for one time notification only. Location manager then waits for one time period at 108 and returns to step 100 and starts

the monitoring routine over. Once the vehicle travels within the radius for the registered location, location manager 44 notifies the registering component that the registered location has been reached.

Fig. 10 is a graph showing an example of how applications 47 can interact with communications manager 36 to describe its communication requirement. This figure shows time to obtain content versus acceptable cost. This curve could be implemented as part of an application 47, as part of communication manager 36 and accessed by each application 47 via communication manager 36, or as a separate database to which each application 47 has access. An application 47 illustratively decides to request all the content from the current day's Internet edition of a major newspapers. The application 47 then can use the curve of Fig. 10 to decide the amount of time to request that the content be obtained in. For example, the requesting application 47 can review the curve of Fig. 10 and determine that the content can be obtained in less than five seconds at a cost of \$0.50 or obtained in less than five minutes at a cost of \$0.01. Since a ten minutes difference in delivery time makes little difference when dealing with news content published daily, the application 47 requests communication manager 36 to obtain the content within ten minutes at the lowest possible cost. Communication manager 36 then utilizes this information in determining which wireless service to use to obtain the content and when to use it. This interaction process between applications 47 and communications manager 36 will be termed herein as the unified content access layer API (applications program interface).

In an illustrative embodiment, the curve, such as shown in Fig. 10, would not need to be defined in its totality, but could be approximated by a few points, such as the

highest cost/ shortest time, median cost, median time, and lowest cost/longest time. Also, in the example of Fig. 10, the factors considered are cost versus time, but it should be understood that these factors are illustrative only and the decision curve used by communication manager 36 can include other or alternative factors, such as power consumption, security, and others, and the methodology described will be equally applicable.

The key importance of Fig. 10 is that it shows a particular method to design and implement the API for unified content access layer. The unified content access layer is mainly composed of communication manager 36 and various other supporting components such as wireless service availability monitor 34. The general method to communicate in today's Internet is the TCP/IP socket based programming model in which an application interacts with the operating system's TCP/IP stack and open TCP channels for communication with other network computers. This model is fully supported by the unified content access layer. By allowing applications to describe their communication requirements such as cost and performance, the direct TCP/IP socket based communication method is even enhanced because wireless network options will be chosen accordingly to accommodate each application's needs. Furthermore, a general delayed communication transaction model will be provided to applications so that they can simply request the sending and receiving of some data objects. This model is similar to FTP or HTTP GET method, in which an application describes a data object it needs to receive or send using a URL (for example a web page address) to the communication manager along with its requirement as shown in Fig. 10. The communication manager is

in turn responsible for using the best wireless communication method at right place/time for the applications in the right order to attempt to satisfy all the applications' needs.

In particular, an application now has an API for the following features:

1. An application can describe its communication requirements in terms of duration,  
bandwidth, cost, etc. to the unified content access layer.
2. The unified content access layer can describe the available wireless options along  
the route and a general wireless communication quality prediction to the  
applications so that they would be able to decide when to use a particular wireless  
option.
3. An application can now describe a data object for sending/receiving and  
associated timing and cost requirements to the unified content access layer. The  
unified content access layer will find the best way to achieve the requests received  
from all the applications.

An example of the interaction of elements of architecture 40 is described with  
reference to Figs. 8 and 9. At T100, vehicle 18 (not shown in Figs. 9 and 10) starts and  
navigation system 26 determines the location of vehicle 18 on route 300, illustratively,  
the street location that vehicle 18 is at. At T101, navigation system 26 passes this  
information, such as vehicle 18 is on highway 82 at location (x,y), to wireless coverage  
manager 42. At T102, wireless coverage manager 42 looks up what wireless services are  
available at this location in network coverage database 22, which in the example shown  
in Figs. 9 and 10, is MAN and WAN, and passes this information to communications  
manager 36. At T103, communication manager 36 decides which wireless service to use,  
which in the example shown is MAN, based on factors such as cost and performance.

At T104, navigation system 26 figures out the details of route 300 and passes this information to wireless coverage manager 42, such as vehicle 18 will travel south on highway 82 for ten minutes, turn south onto highway 85 and travel south on highway 85 for fifteen minutes, turn south on highway 280 and travel south on highway 280 for twenty minutes, and so on. At T105, wireless coverage manager 42, using the details about route 300 passed to it by navigation system 26, accesses network coverage database 22 and develops a prediction of the wireless communication services availability for route 300, for example, as vehicle 18 travels route 300, it will have seventeen minutes of MAN coverage availability and thereafter will only have WAN coverage available. At T106, wireless coverage manager 42 requests location manager 44 to monitor for the MAN coverage boundary on highway 85.

At T107, navigation system 26 informs location manager 44 of the location of vehicle 18 on route 300 and its speed. At T108, location manager 44 determines that vehicle 18 is about to cross the MAN coverage boundary on highway 85 and informs wireless coverage manager 42 that vehicle 18 will cross the MAN coverage boundary on highway 85 in a certain time, such as ten seconds. At T109, wireless coverage manager 42 informs communication manager 36 that vehicle 18 will travel out of the MAN coverage area in the certain period of time, such as ten seconds, and of the wireless communication services that will be available when that occurs, which in the example shown is WAN coverage. At T110, communication manager 36 instructs communication protocol stacks 38 to switch to WAN before the MAN connection is disrupted.

A further embodiment of this invention utilizes the bandwidth available with wireless local area networks, such as the 802.11 wireless LAN, to burst data to mobile

communication device 20 in the vehicle 18. . This method will be referred to herein as "Drive-By InfoFueling." As has been mentioned previously, wireless LAN technology has generally not been used for mobile data communication due to its very limited geographic coverage. However, many data communications do not need to be

5 communicated to the mobile communication device 20 in real time. Therefore, InfoFueling Stations 45, which are LAN wireless base stations, can be spaced along streets and be used to burst data to the mobile communication device 20 at high speeds using the bandwidth available with LAN wireless technology, which is currently around 11 megabits per second, when the vehicle enters the coverage area of a LAN wireless  
10 base station. An InfoFueling Station 45 would illustratively comprise a computer, such as an Internet server type of computer, a wireless LAN system, and be connected to the Internet via a high speed Internet connection, such as a DSL connection, cable connection, or T1 connection. In this regard, it is important to know which InfoFueling Station's coverage area that the vehicle will encounter next and the route-based  
15 communication planning method described above can be effectively utilized to provide this information.

With reference to Figs. 2 and 3, Drive-By InfoFueling will now be described As vehicle 18 traverses route 24, communication availability monitor 34 informs communication manager 36 at T5 that an Info-Fueling Station 45 will be reached in a  
20 certain period of time, such as five minutes. At T6, an application 47, such as a News Reader, sends a request to communication manager 36 that a large amount of content be downloaded from the content provider, such as all of the day's new stories from the Internet edition of a major newspaper, within a certain period of time, such as ten minutes



and at the lowest cost. At T7, T8 communications manager 36 requests through the current wireless network connection, MAN 14 in the example shown, that content/service provider 49 (which is illustratively the server handling the Internet edition of the major newspaper) forward this content to the InfoFueling station 45 that vehicle 18 is

5 approaching. In this regard, when communication manager 36 requests the content, it accompanies the request with the identity (illustratively, the IP address) of the InfoFueling Station 45 to which the content is to be transferred, which is the Info-Fueling Station 45 that vehicle 18 is approaching as advised by coverage manager 42.

At T9, content/service provider transfers the content to the specified InfoFueling  
10 Station 45 and the content is cached at the specified InfoFueling Station 45. Communication availability monitor determines when vehicle 18 enters the coverage area of that InfoFueling Station 45 and when it does, informs communication manager 36 at T10 that vehicle 18 has entered this coverage area. Alternatively, mobile data communication device 20 could determine when vehicle 18 enters the coverage area for  
15 that InfoFueling Station 45 based upon the signal strength of that InfoFueling Station 45. In any event, at T11 communication manager 36 requests that the InfoFueling Station 45 download the cached content to vehicle 18, which InfoFueling Station 45 does at T12. At T13, downloading is complete and the communication manager 36 transfers the downloaded content back to the application 47 requested it.

20 In another embodiment of the above Drive-By InfoFueling invention, the wireless LAN base stations, InfoFueling Stations 45, can be mobile and moved to locations to optimize the performance of Drive-By InfoFueling. For example, during rush hour, additional InfoFueling Stations 45 can be moved into the most heavily traveled areas to

provide additional capacity, locate the InfoFueling Stations 45 closer together, and so forth.

Although the invention has been described in detail with reference to certain preferred embodiments and specific examples, variations and modification exist within

5 the scope and spirit of the invention as described and as defined in the following claims.

What is claimed is:

1. A method of selecting which of a plurality of wireless communication options will be used by a mobile communication device, comprising the step of selecting which wireless communication option to use based on a location of the mobile communication device on a route, the route, and the availability for use of each of the plurality of wireless communication options along the route.

2. The method of Claim 1, wherein one of the plurality of wireless communication options is not using any wireless communication.

3. In a mobile communication device, a method of selecting which of a plurality of wireless communication options will be used by the mobile communication device, comprising the steps of:

- (a) storing in the mobile communication device route information that is indicative of the route that the mobile communication device will be traversing;
- (b) storing in the mobile communication device information indicative of coverage areas for each of the plurality of wireless communication options along the route that the mobile communication device will be traversing;
- (c) determining where on the route that the mobile communication device is at as it traverses the route;
- (d) determining whether to switch from a first one of the wireless communication options presently being used to a second one of the wireless

communication options when the mobile communication device approaches a boundary of a coverage area of one of the wireless communication options; and  
(e) switching from the first one of the wireless communication options to the second one of the wireless communication options when the mobile communication device crosses the boundary if the determination was made to switch to that second one of the wireless communication options.

4. The method of Claim 3, wherein the wireless communication options include a plurality of wireless networks.

5. The method of Claim 4, wherein the wireless communication options include at least one of the wireless networks having a plurality of service levels.

6. The method of Claim 4, wherein the wireless communication options include the option of using not using wireless communication.

7. A method of selecting which of a plurality of wireless communication options will be used by a, comprising the steps of:

- (a) storing in a database information indicative of coverage areas for the wireless communication options along a route that the mobile communication device will be traversing;
- (b) determining where on the route that the mobile communication device is at as it traverses the route;

(d) accessing the database to obtain information regarding the communication options available along the route and determining whether to switch from a first one of the wireless communication options presently being used to a second one of the wireless communication options when the mobile communication device approaches a boundary of a coverage area of one of the wireless networks based on the wireless communication options available once the boundary is crossed and those that will be available further along the route; and

(f) switching from the first one of the wireless communication options to the second one of the wireless communication options if the determination was made to switch to that second one of the wireless communication options.

8. The method of Claim 7 wherein the step of switching from the first one of the wireless communication options to the second one of the wireless communication options comprises establishing a connection with the second one of the wireless communication options and dropping a connection to the first one of the wireless communication options only after the connection with the second one of the wireless communication options has been established.

9. The method of Claim 7, wherein the step of storing in a database information indicative of coverage areas for the wireless communication options along a route that the mobile communication device will be traversing includes storing boundary locations of the coverage areas for the wireless communication options along the route

where the boundary locations stored are limited to boundary locations that are on streets of the route.

10. The method of Claim 9 and further including the step of obtaining updated  
5 information concerning the coverage areas of the wireless communication options and updating the database with the updated information.

11. The method of Claim 10 wherein the step of obtaining updated  
10 information concerning the coverage areas of the wireless communication options includes obtaining this information from providers of the wireless communication options.

12. The method of Claim 10, wherein the step of obtaining updated  
15 information concerning the coverage areas of the wireless communication options includes the mobile communication device monitoring signal strengths of the wireless communication options as it passes through the coverage areas for the wireless communication options and developing updated information concerning coverage areas for the wireless communication options based on the monitored signal strengths of the wireless communication options.

20 13. The method of Claim 12 wherein the step of updating the database with the updated information includes determining whether the updated information is for a location presently in the database,

- (a) if the updated information is for a location not presently in the database,  
then storing the updated information in the database for the location;
- (b) if the updated information is for a location presently in the database,  
comparing the updated information with the information stored in the database for  
the location and updating the stored information if updated information is  
different from the stored information.

14. The method of Claim 10 wherein the step of updating the database with  
the updated information includes determining whether the updated information is for a  
location for which information is presently stored in the database,

- (a) if the updated information is for a location not presently in the database,  
then storing the updated information in the database for the location;
- (b) if the updated information is for a location presently in the database,  
comparing the updated information with the information stored in the database for  
the location and updating the stored information if updated information is  
different from the stored information.

15. The method of claim 14, wherein the step of updating stored information  
comprises shifting the stored information toward the updated information by a parameter  
and replacing the stored information with the shifted stored information.

16. The method of claim 15 wherein the step of updating the stored  
information comprises doing so with a running average method wherein the stored

information is the running average of initial information and subsequent update information.

17. A method of storing data in a database that is indicative of coverage areas for wireless communication options along a route that a mobile communication device is traversing, comprising the steps of:

(a) storing boundary locations of the coverage areas for the wireless communication options along the route in the database where the boundary locations are boundary locations on streets of the route;

(b) periodically obtaining updated information concerning the coverage areas of the wireless communication options as the mobile communication device traverses the route; and

(c) updating the database with the updated information.

18. The method of Claim 17 wherein the step of updating the database with the updated information includes determining whether the updated information is for a location for which information is presently stored in the database,

(a) if the updated information is for a location not presently in the database, then storing the updated information in the database for the location;

(b) if the updated information is for a location presently in the database, comparing the updated information with the information stored in the database for the location and updating the stored information if updated information is different from the stored information.



19. The method of claim 18, wherein the step of updating stored information comprises shifting the stored information toward the updated information by a parameter and replacing the stored information with the shifted stored information.

5 20. The method of claim 18 wherein the step of updating the stored information comprises doing so with a running average method wherein the stored information is the running average of initial information and subsequent update information.

10 21. A method of determining which of a plurality of wireless communication options to use for data transmission with a mobile wireless communication device that is traversing a route, comprising the steps of determining where the mobile wireless communication device is on the route, determining which wireless communication option to use for the data communications and when to use it based upon the location of the  
15 mobile wireless communication device on the route and the availability of the wireless communication options at the location where the mobile wireless communication device is at on the route and locations on the route where the mobile wireless communication device will subsequently be at as it travels the route.

20 22. The method of claim 21, wherein the step of determining which wireless communication to use and when to use it includes making the determination based upon the cost to use each wireless communication option.

23. The method of claim 21, wherein the step of determining which wireless communication option to use and when to use it includes making the determination based upon the cost to and performance level of each wireless communication option.

5 24. A method of providing a uniform content access layer application program interface for application programs that use mobile communication provided by a mobile communication device, comprising the steps of:

(a) providing a database accessible by the application program;

10 (b) storing in the database information concerning any wireless communication options that are available for use by the mobile communication device as it traverses a route;

(c) the application program deciding its requirements for data transfer via wireless communication based on the information about the wireless communication options stored in the database.

15 25. The method of claim 24 wherein the information about the wireless communication options stored in the database includes information concerning cost and performance of the wireless communication options.

20 26. A method of providing a uniform content layer application program interface for application programs that use mobile communication provided by a mobile communication device, comprising the steps of:

(a) providing a database accessible by the application program; and

(b) storing in the database information concerning any wireless communication options that are available for use by the mobile communication device as it traverses a route.

5           27.     The method of claim 26 wherein the information about the wireless communication options stored in the database includes information concerning cost and performance of the wireless communication options.

10           28.     A method of wireless transmission of data to mobile data communication devices using wireless communication technology that has high bandwidth but low geographic coverage, comprising the steps of:

(a) providing multiple wireless communication base stations along roads, each base station having a high bandwidth and low geographic coverage;

15           (a)     storing in the mobile data communication device route information that is indicative of the route that the mobile communication device will be traversing;

(b)     storing in the mobile communication device information indicative of coverage areas for each base station located along the route that the mobile communication device will be traversing;

20           (c)     determining which base station to use to send data to the mobile data communication device based on the location of the mobile data communication device on the route that it is travelling;

(d) transferring data to be sent to the mobile data communication device from a content provider to the base station that it was determined to use to send the data to the mobile data communication device; and

(e) the base station to which the data was transferred transmitting the data to the mobile data communication device when the mobile data communication device enter that base stations coverage area.

29. A method of fueling a vehicle with information through a wireless communication device in said vehicle, comprising the steps of:

(a) determining a predicted time when said vehicle will be able to communicate with an info-fueling station having a predictable geographic position;

(b) sending a request for information from said vehicle through said wireless communication device to at least one wireless communication network;

(c) routing said information from an information source in communication with said wireless communication network to said info-fueling station; and

(d) downloading said requested information to said vehicle through said info-fueling station during the time that said wireless communication device in said vehicle is in communication range of said info-fueling station.

30. The method according to Claim 29, wherein said info-fueling station has a fixed position relative to vehicles.

31. The method according to Claim 29, wherein said information request identifies said info-fueling station.

32. The method according to Claim 29, wherein said wireless communication  
5 network identifies said info-fueling station.

33. The method according to Claim 29, wherein said wireless communication device is coupled to an on-board communication network in said vehicle.

10 34. The method according to Claim 29, wherein said downloading of information commences once the detected signal strength of communication between said wireless communication device in said vehicle with said info-fueling station reaches a predetermined level.

15 35. The method according to Claim 29, wherein said wireless communication network also routes previously stored requests for information to said vehicle through said info-fueling station.

20 36. The method according to Claim 29, wherein said info-fueling station is mobile.

37. The method according to Claim 36, and further including the steps of moving each mobile info-fueling station to a location to optimize performance of info-fueling communication.

5 38. A method of wireless transmission of data to mobile data communication devices using wireless communication technology that has high bandwidth but low geographic coverage, comprising the steps of:

(b) providing multiple mobile wireless communication base stations on roads, each base station having a high bandwidth and low geographic coverage;

10 (a) storing in the mobile data communication device route information that is indicative of the route that the mobile communication device will be traversing;

(b) storing in the mobile communication device information indicative of coverage areas for each base station located along the route that the mobile communication device will be traversing;

15 (c) determining which base station to use to send data to the mobile data communication device based on the location of the mobile data communication device on the route that it is travelling;

(d) transferring data to be sent to the mobile data communication device from a content provider to the base station that it was determined to use to send the data to the mobile data communication device;

20 (e) the base station to which the data was transferred transmitting the data to the mobile data communication device when the mobile data communication device enter that base stations coverage area; and

(f) moving the base stations to locations to optimize communication between base stations and a plurality of mobile data communication devices.

### **Abstract of the Disclosure**

A method for selecting which of a plurality of wireless communication options will be used by a mobile communication device based on the location of the mobile communication device on a route, the route, and the availability for use of each of the plurality of wireless communication options along the route. Information indicative of coverage areas for the wireless communication options available along the route are stored in a database by storing boundary locations of the coverage areas for the wireless communication options along the route where the boundary locations stored are boundary locations that are on streets of the route.

A method of providing a uniform content layer application program interface for application programs that use mobile communication provided by a mobile communication device stores information concerning any wireless communication options that are available for use by the mobile communication device as it traverses a route is stored in a database. The application program decide which wireless communication option to use based upon the information about the wireless communication options in the database.

A method of fueling a vehicle with information through a wireless communication device determines a predicted time when the vehicle will be able to communicate with an info-fueling station having a predictable geographic position. A request for information from the vehicle is sent through the wireless communication device to at least one wireless communication network. The information is routed from an information source in communication with the wireless communication network to the info-fueling station and downloaded to the vehicle.






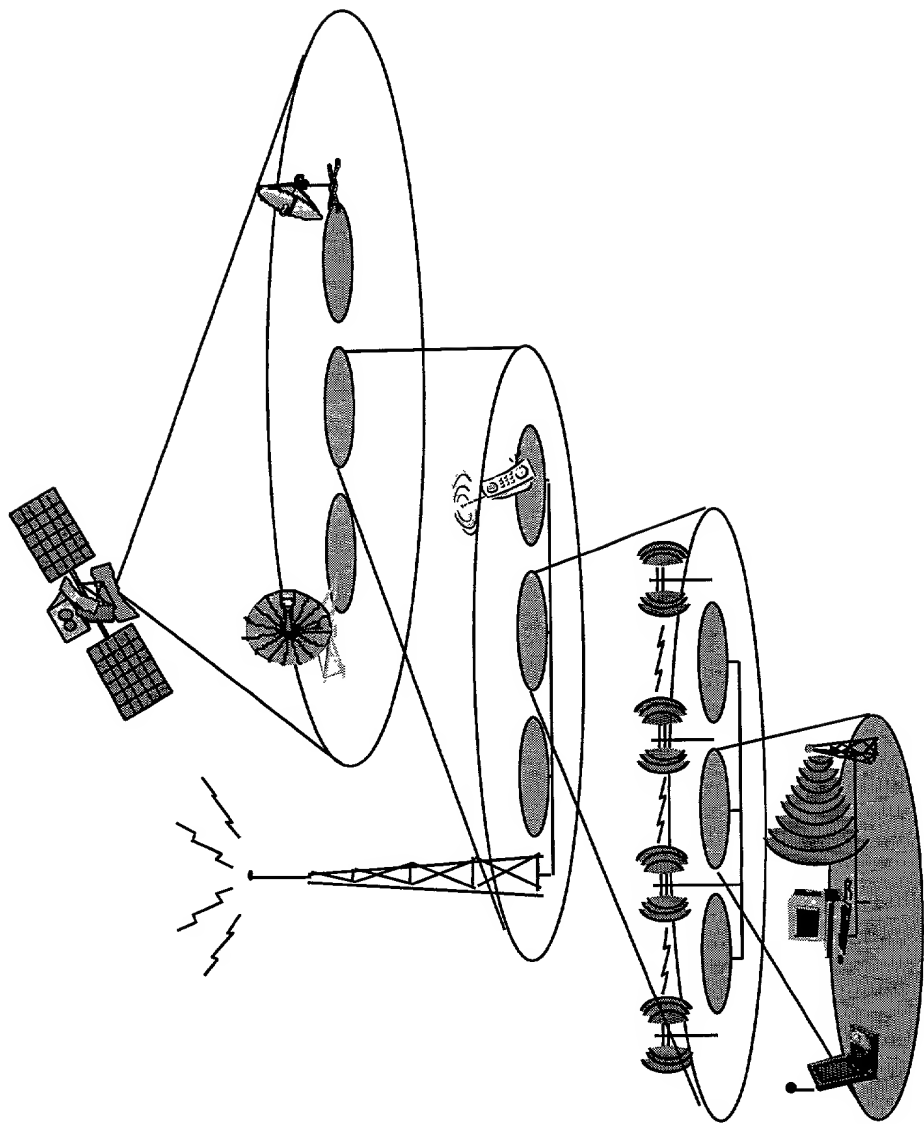


FIG. 1  
(Prior Art)

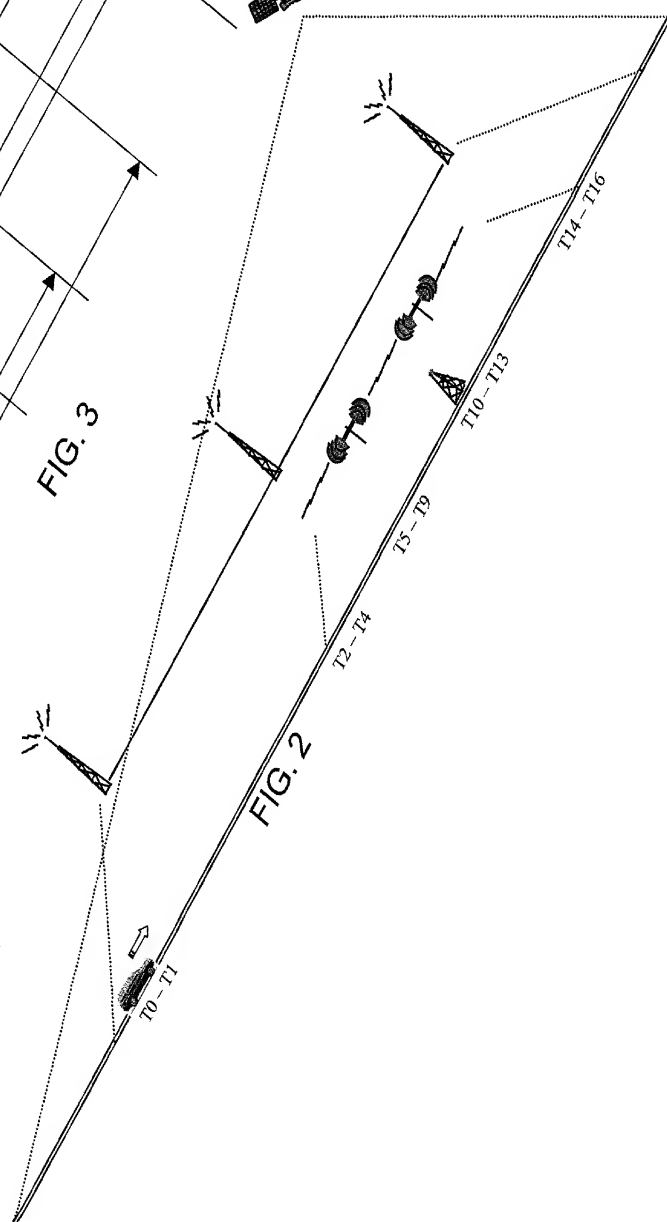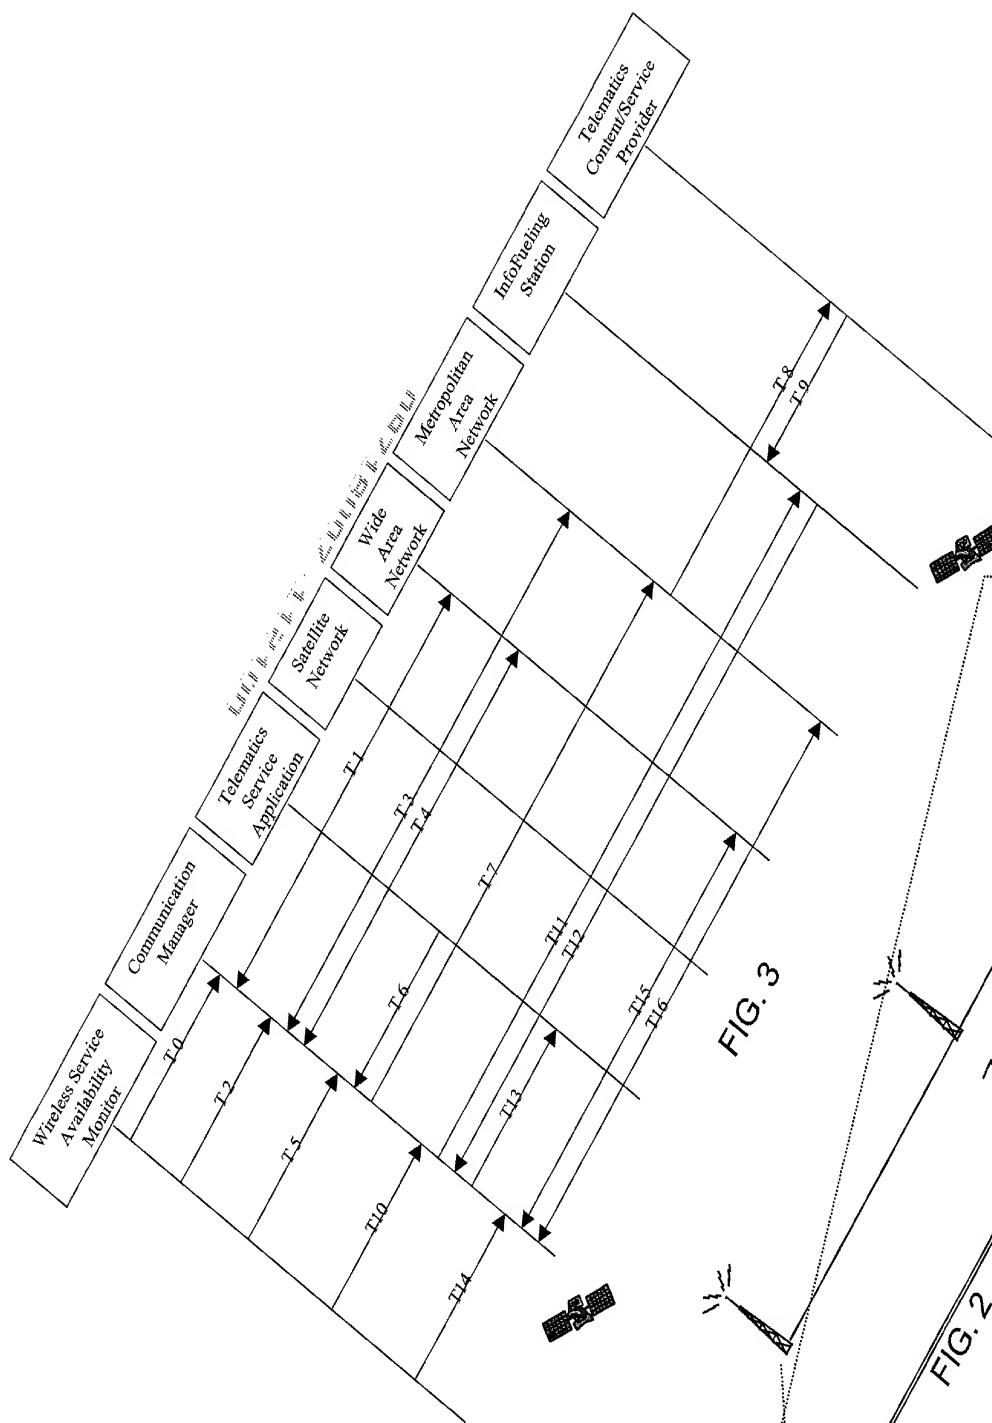

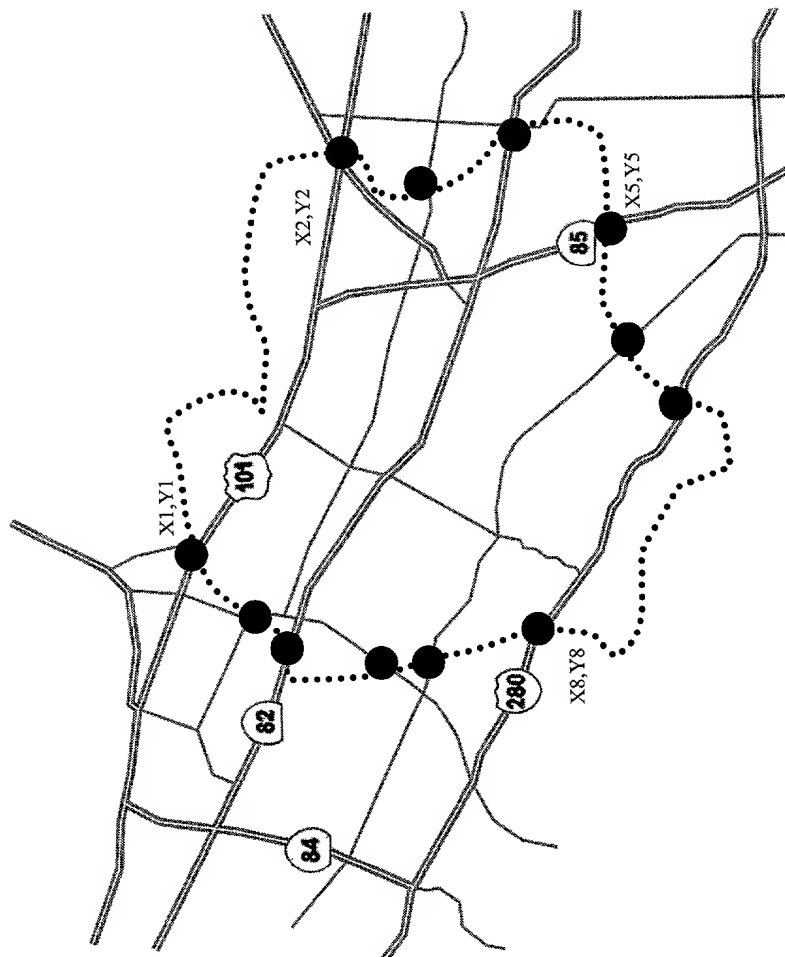

<HW101, (x1,y1), MAN boundary>  
 <HW101, (x2,y2), MAN boundary>  
 ...  
 <HW85, (x5,y5), MAN boundary>  
 ...  
 ...  
 <HW280, (x8,y8), MAN boundary>  
 ...  
 ...

FIG. 4

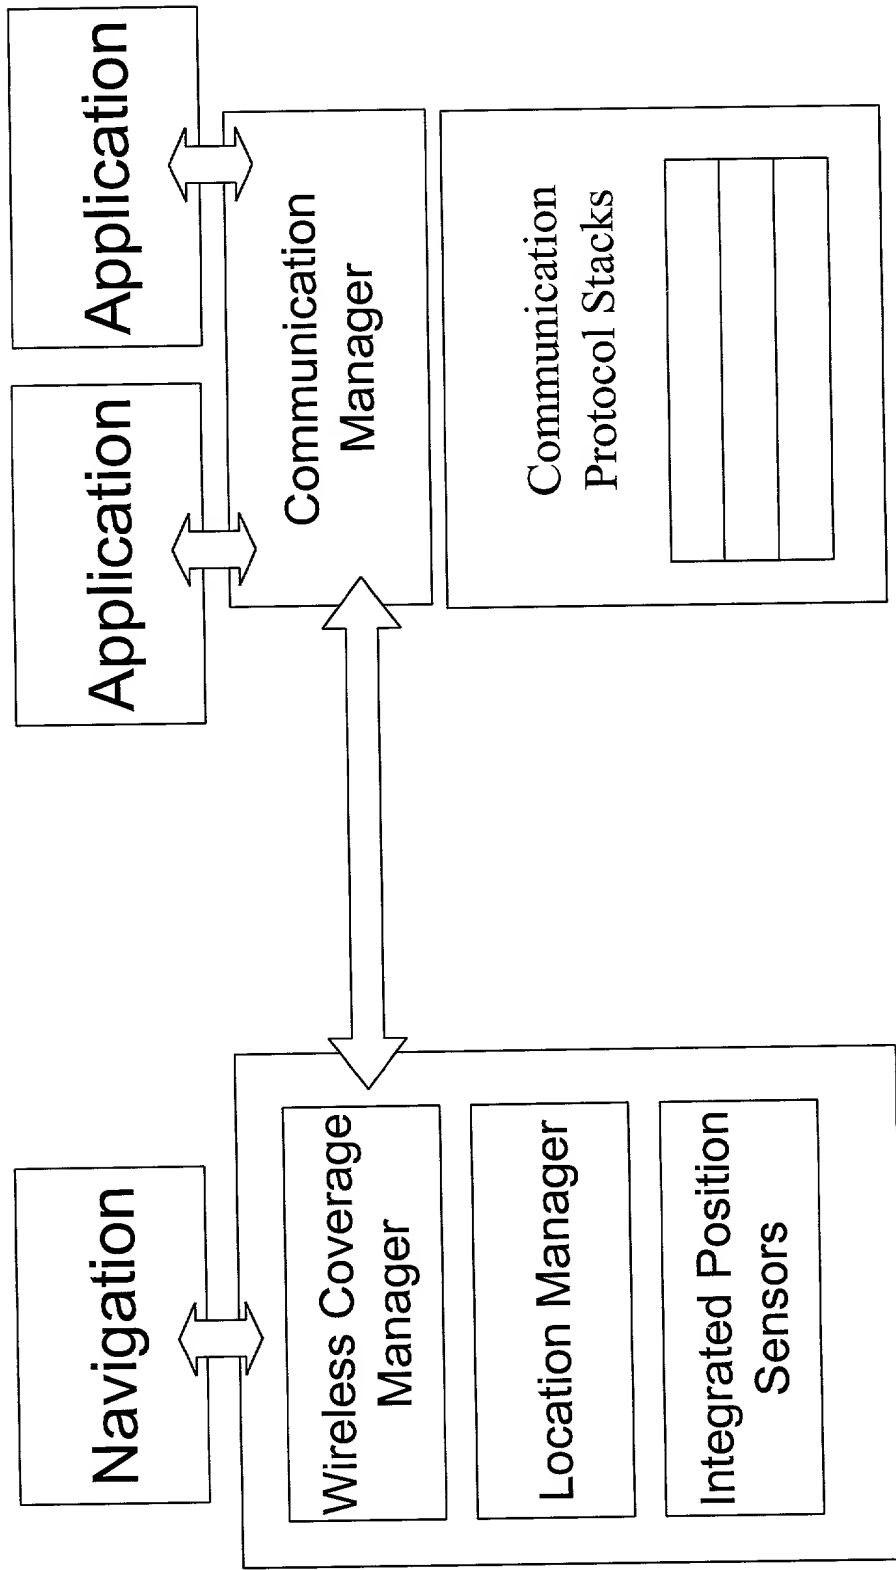


FIG. 5

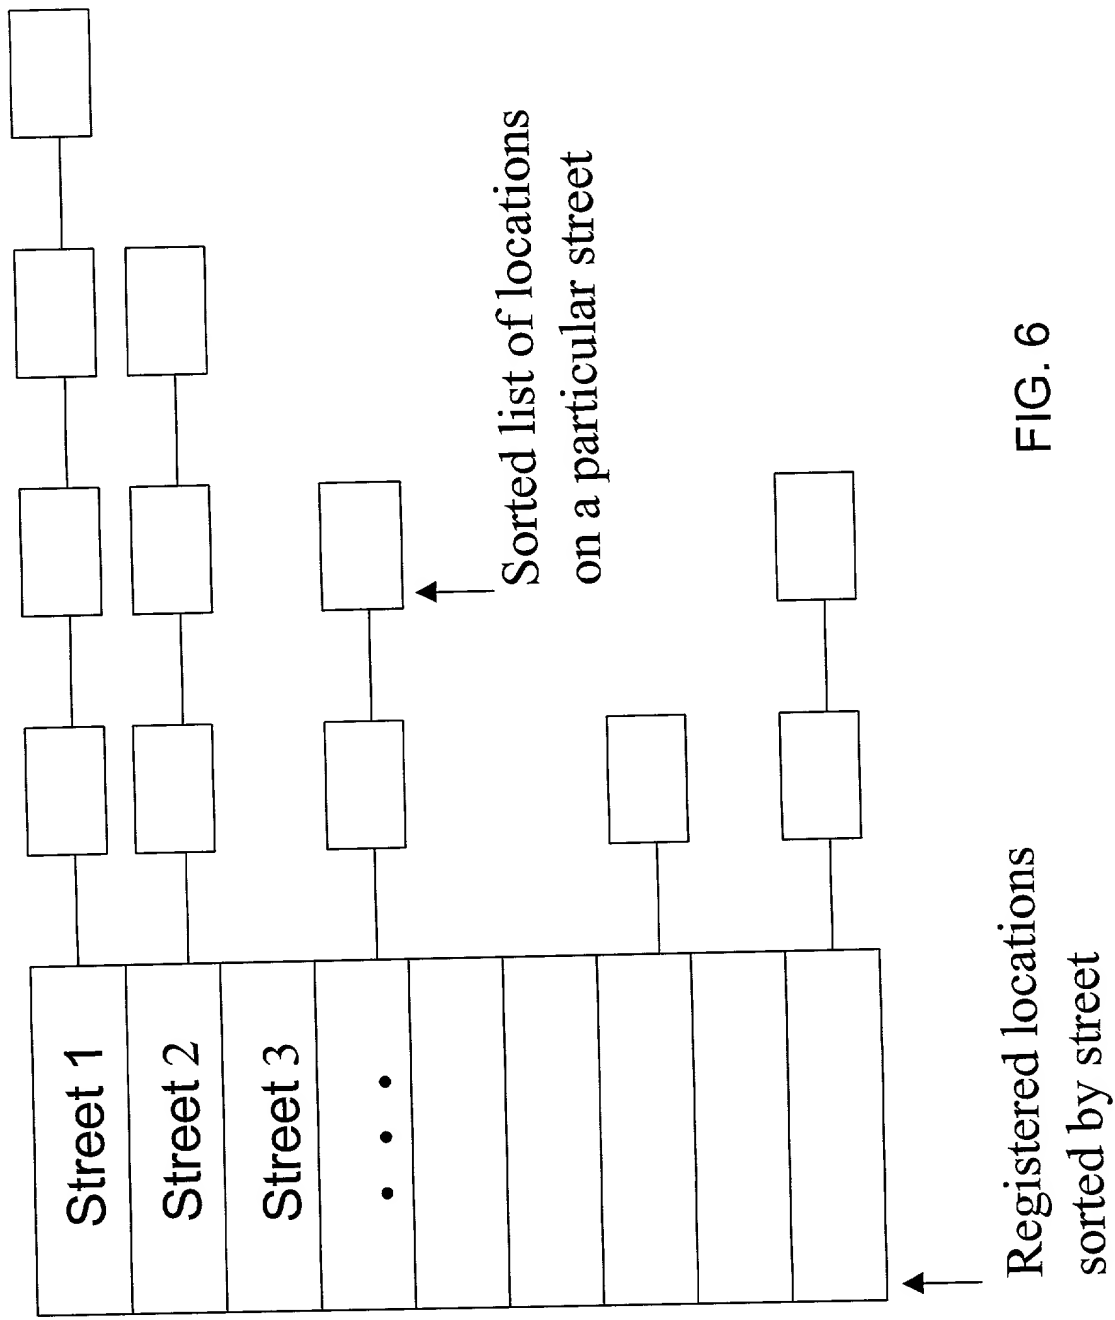


FIG. 6

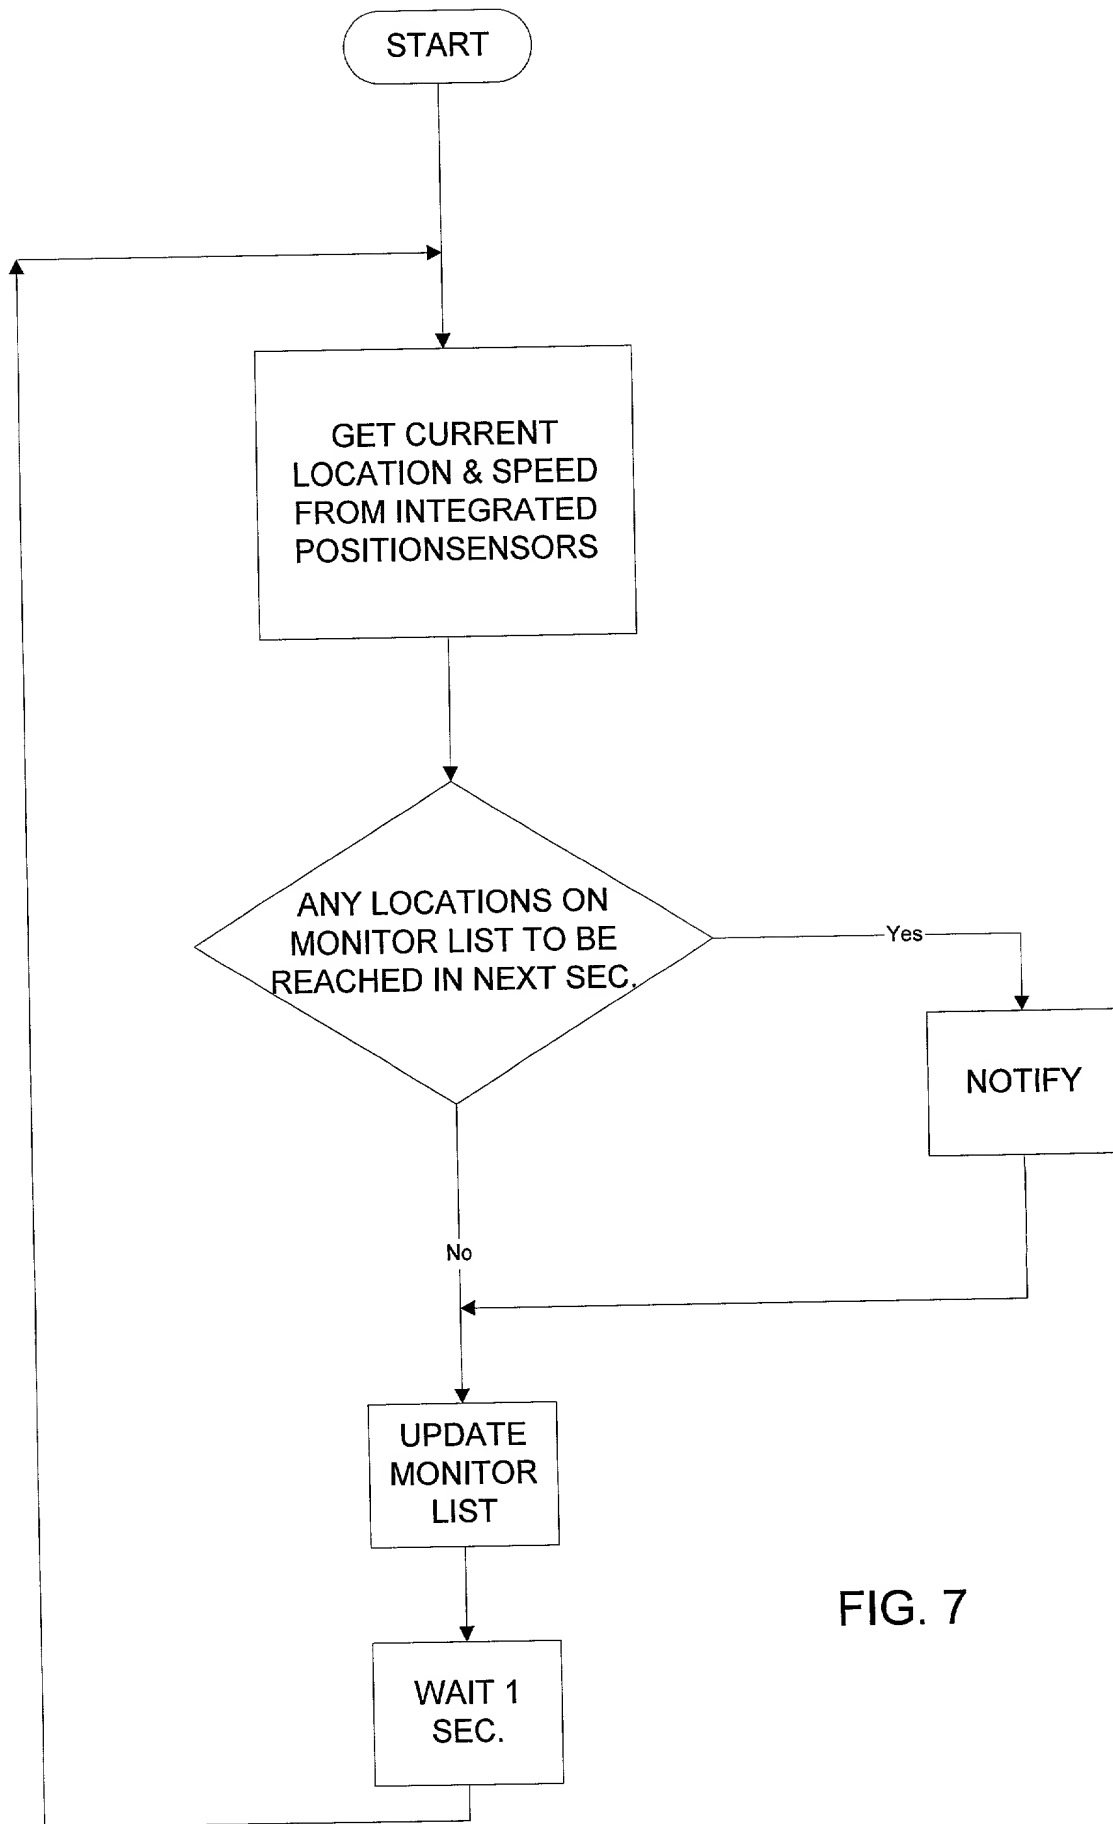


FIG. 7

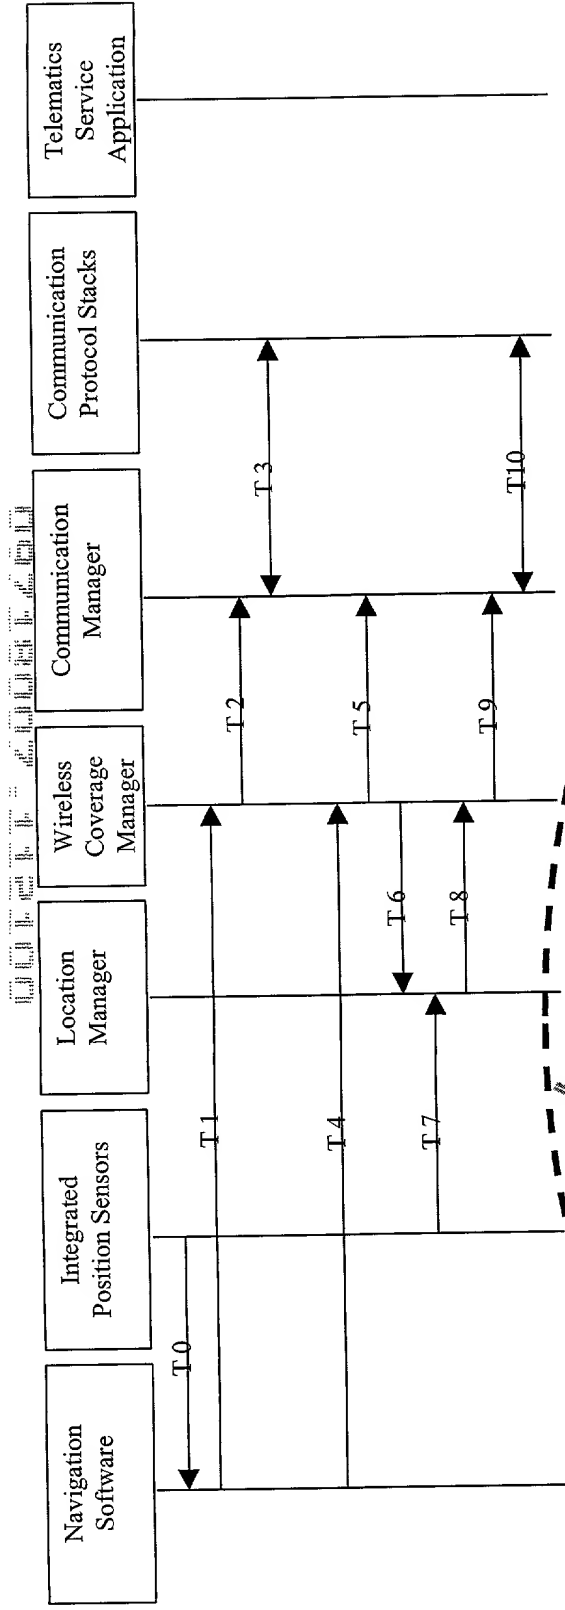


FIG. 8

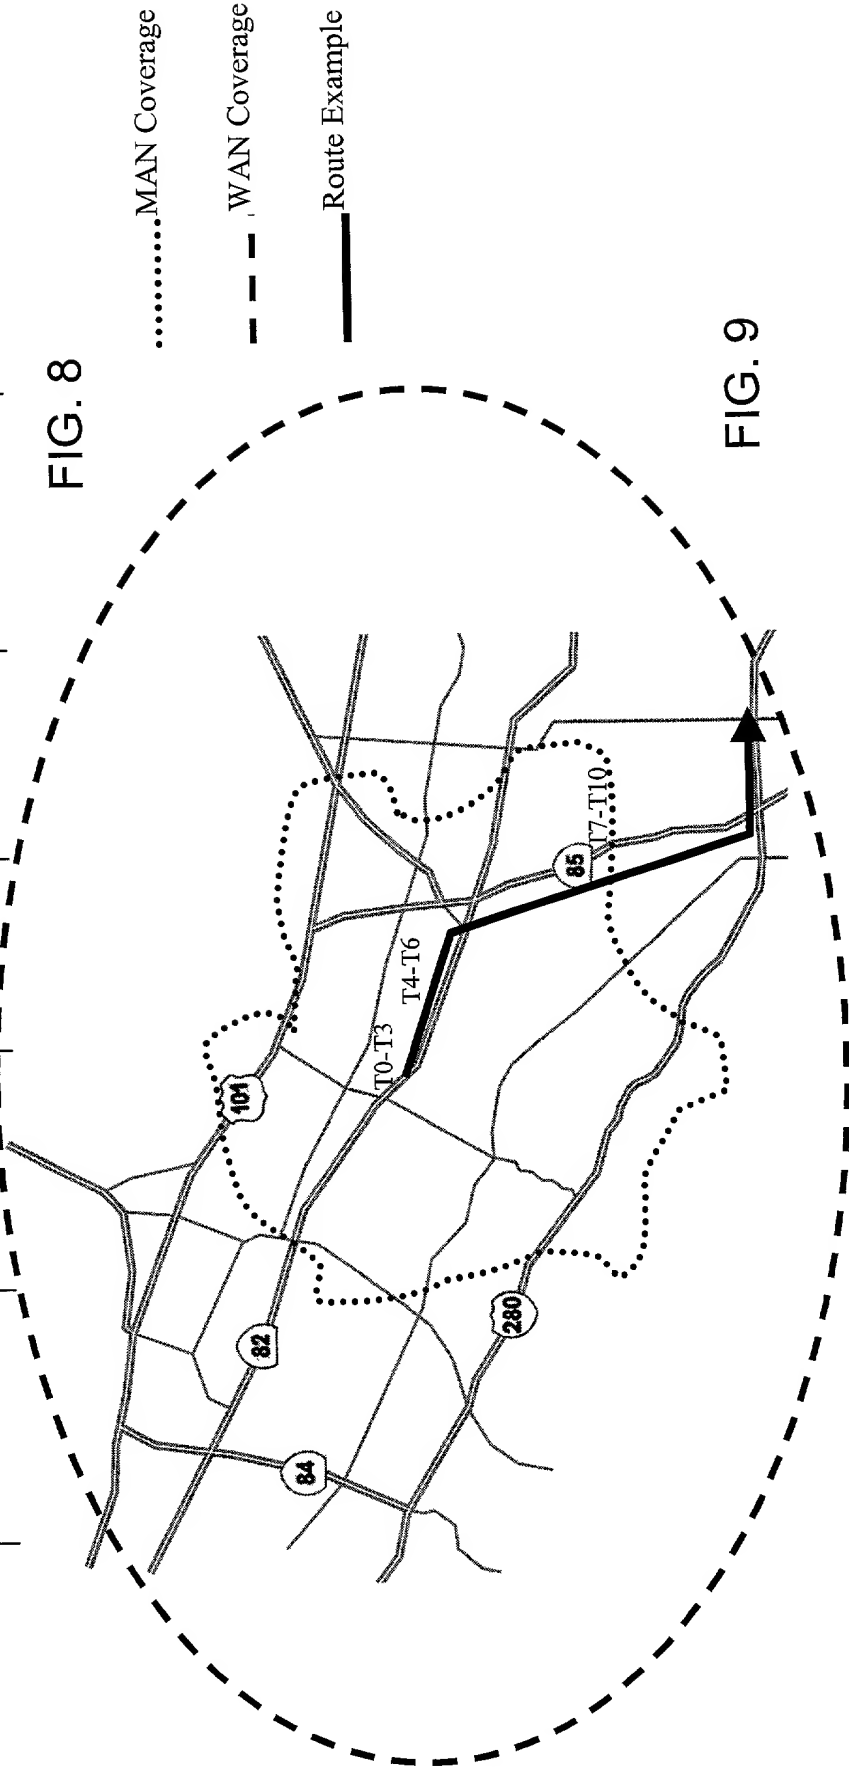


FIG. 9

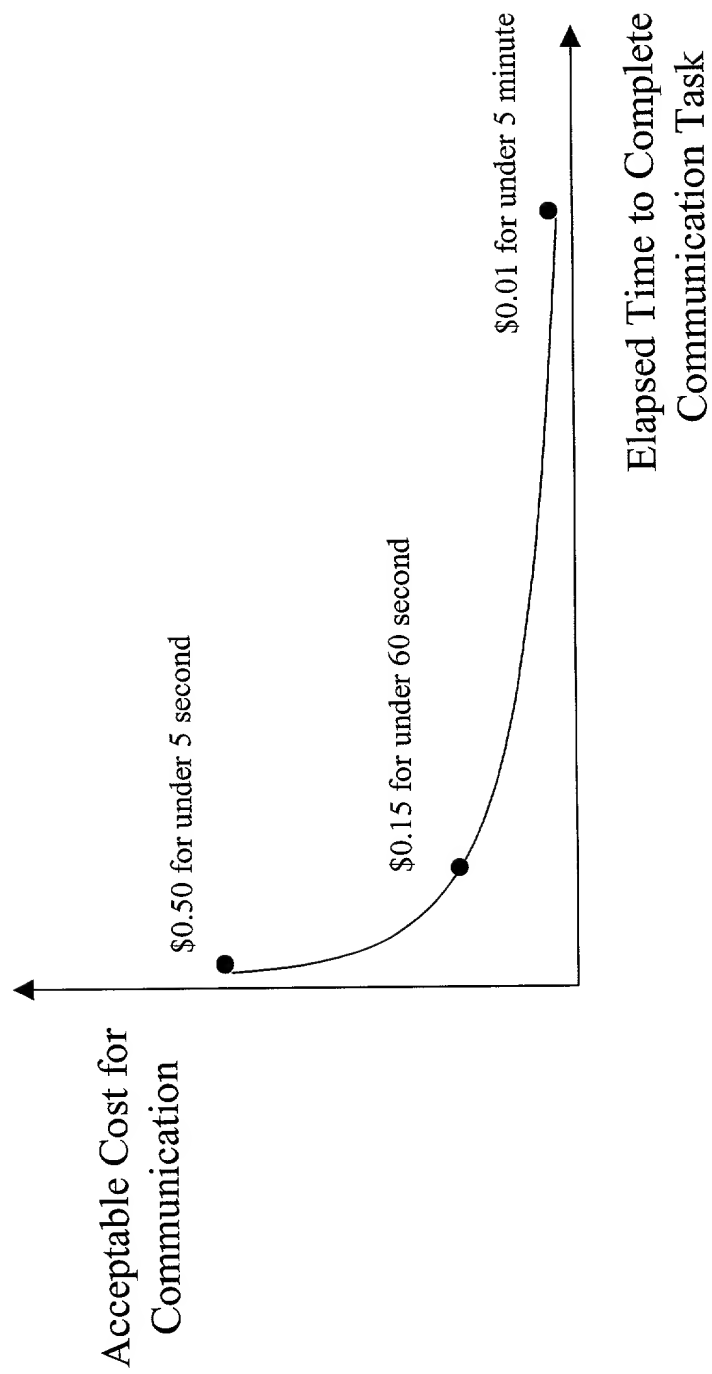


FIG. 10



DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As below named inventor, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**ROUTE-BASED COMMUNICATION PLANNING ARCHITECTURE AND METHOD FOR WIRELESS COMMUNICATION**

the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Power of Attorney: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Donna L Berry,	Registration No. 36,451
Mark P Calcaterra,	Registration No. 30,363
William J Coughlin,	Registration No. 29,143
Roland A Fuller III,	Registration No. 31,160
Marc Lorelli,	Registration No. 43,759
Lisa K Mack,	Registration No. 42,825
Kenneth H MacLean,	Registration No. 25,236
Lawrence J Shurupoff,	Registration No. 30,219

Send Correspondence to: Roland A Fuller III, CIMS 483-02-19  
DaimlerChrysler Intellectual Capital Corporation  
800 Chrysler Drive East  
Auburn Hills, Michigan 48326-2757

Direct telephone calls to: Roland A Fuller III, (248) 944-6514

Full name of Inventor: Xi Jiang

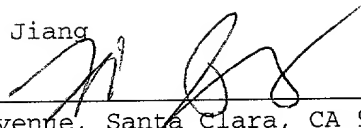Inventor's Signature: 

Date: 11/14/00

Residence: 444 Saratoga Avenue, Santa Clara, CA 95050

Post Office Address: Same as above

Citizenship: China

CONFIDENTIAL